
18					
9					
		and the second s			
		100			
		1995	K ala		
	-		*		1
	60	-	3	4	

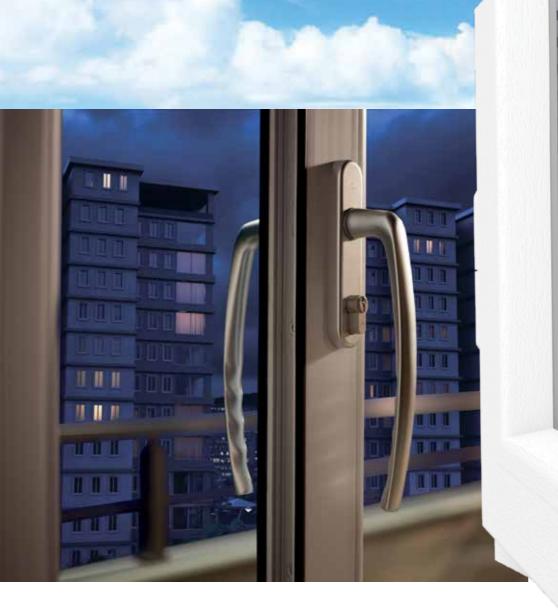

Türkoba Mah. Fırat Plastik Cad. 23 Büyükçekmece 34537 İstanbul Turkey

- T 0090 (212) 866 41 41 866 42 42
- 444 9 378 (FRT) | 0 800 219 80 20 CUSTOMER SERVICE **F** 0090 (212) 859 04 00 | 859 05 00
- E firat@firat.com info@firat.com

www.firat.com www.winhouse.com.tr

FACEBOOK | TWITTER | LINKEDIN firatplastik







ELEGANCE 80 & ELEGANCE SELECTIVE WINDOW AND DOOR SYSTEM

NEW ERA ON PERFECT INSULATION AND WIND LOAD RESISTANCE **ELEGANCE 80 & ELEGANCE SELECTIVE**

Elegance and Elegance Selective systems provide more performance than what is desired from a window; they carry the quality to the highest point by combining insulation, power, and aesthetic criteria; and become a new solution partner for the projects. The system providing perfect heat insulation with its 80 mm-wide profiles, its design with 6 chambers and its triple sealing system, is specially designed for the discharge of water from outer environment. Full insulation of the middle seal was provided by the slope in the sash design. The special design which provides superior durability against the high wind load on multi-storey buildings, provides excellent performance without need for additional profiles suchlike grillage thanks to wide mullion profile. The Elegance Selective which has Class A wall thickness offers perfect solutions for all requirements of the projects where there are high-rise buildings and high wind load. The Elegance offers alternative solutions for decorative expectations of buildings and your house with its 21 different color options and aesthetic edges. The series develops different alternatives that are compatible with your furniture and wall

color and the outer facade of buildings.

AESTHETICS

Window production meeting various aesthetic and decorative expectations is possible with 21 different lamination color options. Different color foils can be used, inside and outside, depending on the building facades and indoor decoration. While wooden laminate options provide traditional wood aesthetics; it is also possible to make windows providing a consistent aluminium look by using different shades of grey, mainly aluminium brush effect and anthracite. Thanks to its sharp and wide edges, Elegance 80 system is a product that fits to the modern buildings and raises their values. It provides savings through high heat insulation.

SYSTEM

- \rightarrow All profiles are 80 mm wide.
- \rightarrow Elegance Selective has Class A wall
- thickness; Elegance has Class B wall thickness.
- \rightarrow It's designed as 6 chambered.
- \rightarrow Triple sealed.
- \rightarrow To provide full insulation of the middle seal, sashes are sloped.

 \rightarrow Thanks to the water draining system on the frame, 100% water impermeability is provided by discharging the water from inner and outer sides of the middle seal.

- \rightarrow It is appropriate for 13 axis espagnolette system.
- \rightarrow It is designed in such a manner to easily produce a solution for all architectural details with its detailed and auxiliary profiles.

WIND LOAD RESISTANCE

 \rightarrow Elegance system is designed pursuant to 3.000 Pa (245 km/h) safety test on wind load and 600 Pa (110 km/h) water impermeability strength test and it has successfully passed these tests.

 \rightarrow The Elegance Selective Series which has Class A wall thickness for providing resistance in high wind load structures, offers perfect solutions.

 \rightarrow During the design stage of system, shape of reinforcement steels, their locations in the profile, and the maximum wind load that the existing structures may be exposed to, were all considered.

WATER AND AIR IMPERMEABILITY

→ High endurance against rain was provided even on the high wind load thanks to its drainage angle and sets developed to drain the water in a faster and simpler way. \rightarrow The system did not let any water inside and proved its high quality under the tests carried out with 600 Pa (110 km/h) wind load and 4 liters of rainwater per minute.

→ Water leak was totally blocked with the triple sealing system. → Thanks to the mullion profile that has a wide surface, high performance is provided even in the high-rise buildings and high wind loads, without need for any additional profiles such as box profile.

HEAT INSULATION

 \rightarrow Elegance 80 system was designed to reach the highest values of heat insulation by taking into consideration the middle seal, reinforcement steel, number and location of chambers, and all points that form a heat bridge. \rightarrow By blocking the flow of heat from indoors to outdoors in winter, and vice versa in summer, through a special frame and sash seals and triple middle sealing features it saves energy both in summer and winter. \rightarrow In accordance with the standard TS EN ISO 10077-2, with a glass system of dimensions 1.23 m x 1.43 m, the following values have been achieved: Ug: 0.6 W/m²K, Uw: 0.91 W/ m2K, and Uf: 1.02 W/m²K.


SOUND INSULATION

 \rightarrow Because of the usage of acoustic glasses in Elegance 80 system, indoor environment quality is enhanced by providing high sound insulation values.

 \rightarrow Elegance Series provides isolated and comfortable environments even in flats placed near highways and airports by maintaining sound insulation up to 40 dB levels.

Window Heat Flow Diagram Uf:1,02 W/m² °K Uw: 0,91 W/m² °K

6 CHAMBERS

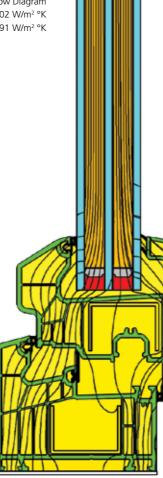

RAME&SASH

WIDTH 80 MM

COLOUR AND DESIGN CHART	WHITE	CREAM WHITE	MAHOGANY	ELEGANCE SERIES PROFILES			
PROFILE WIDTH 80 mm WALL THICKNESS ELEGANCE SELECTIVE A CLASS ELEGANCE B CLASS NUMBER OF SEALS	EICHE RUSTICAL	DARK OAK	DARK GREEN	FRAME PROFILE	MULLION PROFILE	MULLION SASH PROFILE	
3 (MIDDLE SEALING) NUMBER OF CHAMBERS 6 SEAL TPE GREY / BLACK	STEEL BLUE	GOLDEN OAK	OAK	DRAINED SASH PROFILE	SASH PROFILE	INSIDE OPENING DOOR PROFILE	
PROFILE HEAT INSULATION 1,02 W/m² °K WINDOW HEAT INSULATION 0,91 W/m² °K SOUND INSULATION 40 db	WALNUT	CEDAR	ANTEAK	OUTSIDE OPENING DOOR PROFILE	LINING FRAME PROFILE	SASH ADAPTING PROFILE	
AIR PERMEABILITY CLASS 4 WATER IMPERMEABILITY CLASS 9A	WINCHESTER	MACORE	ANTHRACITE	24 MM GLAZING BEAD	32 MM GLAZING BEAD	DETAIL ADAPTING PROFILE	
WIND LOAD RESISTANCE CLASS C3 GLASS THICKNESS (MM): 24,32,36 The calculations were made ASH TROMPET GR			GREY	GREY			
by using a glass unit with a thermal conductivity coefficient of 0,6 W/m ² °K for a window with dimensions of 1,23x1,43 m in accordance with the standard TS EN ISO 10077-2.	SILVER BRUSH EFFECT	SILVER D (SILVER GREY)	ALUMINIUM BRUSH EFFECT				

